QUANTITY

ITEM NO

# Velocity Series<sup>™</sup> Pressure Fryer

8 Head



Henny Penny introduced the world to commercial pressure frying over 50 years ago. Pressure fried foods absorb less oil and retain more more natural juices and flavor. Pressure frying also cooks food faster at lower temperatures.

Today, Henny Penny ushers in a new generation of innovation with Velocity Series pressure fryer that not only improves product quality, but reduces cost of ownership, as well.

The Velocity Series cooks the same industry leading 8-head bone-in chicken (8 head) per load as our previous high volume fryer in 25% less oil!



Large loads cook evenly and are handled easily with the patented counter-balance lift system. Two half racks fit on a standard sheet pan for holding.

Less oil in the fry pot means faster recovery and greater energy savings. But that's just the beginning.

A completely automatic filtration system washes food particles down the drain and filters the oil after every cook cycle in about the time it takes to rack the next load.

With automatic oil top off, crew never have to worry about topping off hot oil. Quality of product improves because it is always being cooked in the right amount of oil.

With less oil, frequent automatic filtering and automatic oil top-off, the Velocity Series pressure fryer can extend oil life by 300% compared with our previous high-volume model.

Pressure lock status monitored on control display. Low deck for better egonomics.

Next generation touch control provides an intuitive menu style interface expandable to 160 products.

Accessories shipped with unit

Loading carrier and cover rack

Large capacity crumb catcher

3 brushes and fry pot scraper

• 2 filter screen clips with handles

Available options and accessories

Bulk oil disposal system with front

□ ODS 300 50 lb oil disposal shuttle

and rear dispose connections

Additional baskets or half racks

Quick-connect filter screen

100 PHT filter envelopes

· Quick-connect drain pan

4 wire baskets and basket handle

## **Standard Features**

- Reduced volume fry pot design cooks with 25% less oil
- Fast, automatic filtration after every 4 heavy-duty casters, front locking load extends oil life, increases productivity, and saves labor
- Automatic oil top off keeps oil fresh longer for consistent product quality
- · Hidden components and rounded corners for easy cleaning
- High-efficiency heating elements for fast recovery and energy savings
- Enhanced high-limit temperature protection
- · Patented counter-balanced lid lift allows one handed operation
- Automatic cook-cycle pressure lock
- · Pressure lock status monitored
- · Fully insulated fry pot for energy efficient operation

- · Heavy-duty stainless steel fry pot with 7-year warranty
- Next generation control 3 line menu style digital display
  - with capacitive touch keys 50 programmable products expandable to 160
  - USB support for product upload
  - Extended memory for months of activity logging, management reports, or diagnostics
  - Auto Startup mode with melt, stir, top off, polish, and idle cycles
  - Monitors pressure lock and
  - displays status and alerts Water detection alert

DATE

- Load compensation cycle time
- Proportional heat pulse control
- HENNY PENNY **Engineered to Last**

APPROVED	APPROVED AS NOTED	C RESUBMIT

AUTHORIZED SIGNATURE

© 2014 Henny Penny Corporation, Eaton, OH 45320 USA Revised 06282019


PXE 100 Electric

PROJECT

PXE 100 Electric

# **Velocity Series**<sup>™</sup> **Pressure Fryer**

8 Head

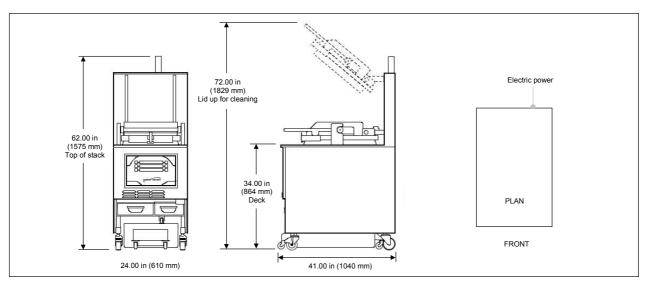

### Dimensions

#### 62.00 in (1575 mm) to top of stack Height Height 72.00 in (1829 mm) lid up to clean Width 24.00 in (610 mm) 41.00 in (1041 mm) Depth Crated

#### Length 45 in (1143 mm) Depth 30 in (762 mm) Height 65 in (1651 mm) Volume 51 ft<sup>3</sup> $(1.44 \text{ m}^3)$ Weight 877 lb (398 kg)

#### **Required clearances**

Тор	6 in	(152 mm) lid up to clean
Sides	6 in	(152 mm) air flow
Back	6 in	(152 mm) air flow
Front	38 in	(965 mm) remove filter pan

#### Electrical

Volts	Phase	Hertz	kW	Amps	Wire*	Cord & Plug Not available for all destinations
208	3	60	17.0	47.2	3+G	7 ft power cord and plug
240	3	60	17.0	40.9	3+G	208 V, 240 V only
380	3	50	17.0	25.8	3NG	
415	3	50	17.0	23.7	3NG	NEMA 15-60P right angle
480	3	60	17.0	20.5	3+G	

\*Units shipped without power cord and plug must have power cord and plug installed on site by a qualified electrician

Continuing product improvement may subject specifications to change without notice

#### 24 Hour Technical Support:

Henny Penny Technical Service 800 417.8405

@hennypenny.com

## Pressure

Operating pressure 12.0 psi Safety valve setting 14.5 psi

Heat 4 immersed elements 4.25 kW each/17.0 kW total

# Oil capacity

75 lb or 38 L Fry pot Reservoir 15 lb or 8 L

### **Bidding specifications**

Provide Henny Penny Velocity Series model PXE 100 high-volume electric pressure frver, designed to cook up to 8-head chicken per load in 75 lb or 38 L oil.

- Unit shall incorporate:
- Automatic filtration · Automatic oil top-off
- Next generation control system with 50
- programmable cook cycles expandable to 160, plus 3-line menu style digital display, pressure lock status, USB support, Auto Startup and full suite of energy and oil management modes
- Patented counter-balanced lid lift Pressure lock seals, creates and maintains 12 psi
- pressure in cooking chamber Seamless stainless steel deck
- Fry pot of heavy duty stainless steel with 7-year warranty
- Oil drain pan with 4 casters, large capacity crumb catcher, quick-connect filter screen and lock-in system with sensor warning when pan is not properly locked into place
- 4 heavy-duty casters, front locking
  Loading carrier with 4 half baskets, 1 cover rack, and basket handle
- Gong brush, straight brush, L tip brush, and fry pot scraper

#### Laboratory certifications



© 2014 Henny Penny Corporation, Eaton, OH 45320 USA Revised 06282019

Henny Penny Corporation PO Box 60 Eaton OH 45320 USA +1 937 456.8400 800 417.8417 +1 937 456.8434 Fax 800 417.8434 Fax w.hennypenny.com

